


# Sharp BP-70C31 Print Driver Installation (01Jun24)

Control Panel → Devices and Printers → & Scanners → *Remove old Sharp printers (if any)*

## Install the New Print Driver for the Sharp BP-70C31

Find the Sharp BP-790C31 driver in the Electronic Archive under Trustees → Equipment Manuals and Documentation → Copiers & Printers → Sharp BP-70C31 MFP → Use This Driver → setup.exe

<\\CPFUMCELECTRONI\cpfumcelectronicarchive\Resource Ministries\Trustees\Equipment Manuals and Documentation\Copiers & Printers\Sharp BP-70C31 MFP\!Use This Driver>

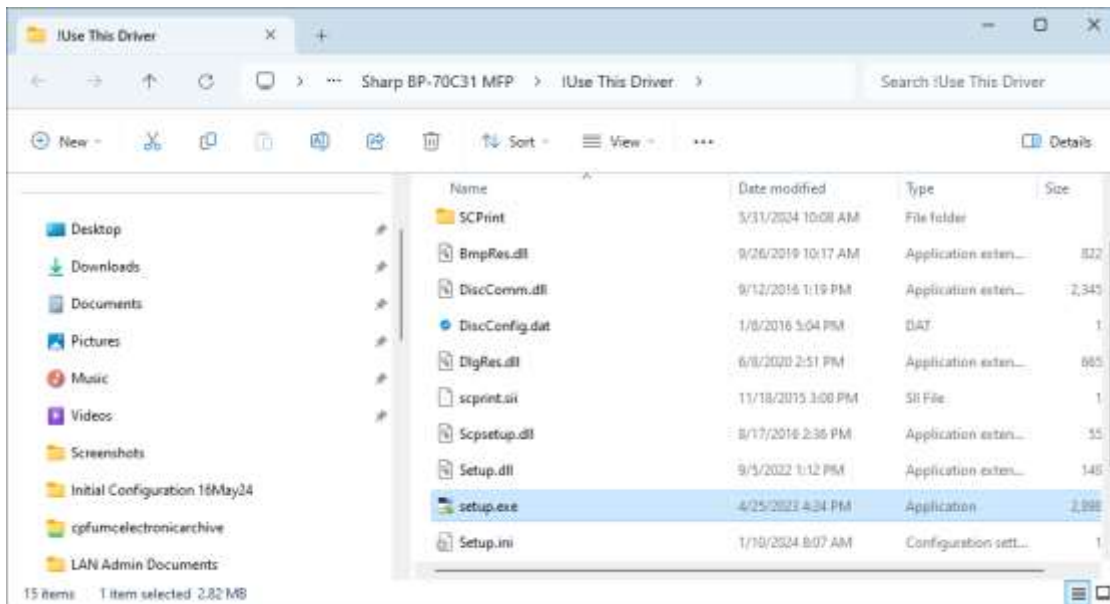


Yes (Driver Installer)

Standard Install → Next




Use Special Conditions and input the IP address if no IP address is automatically found

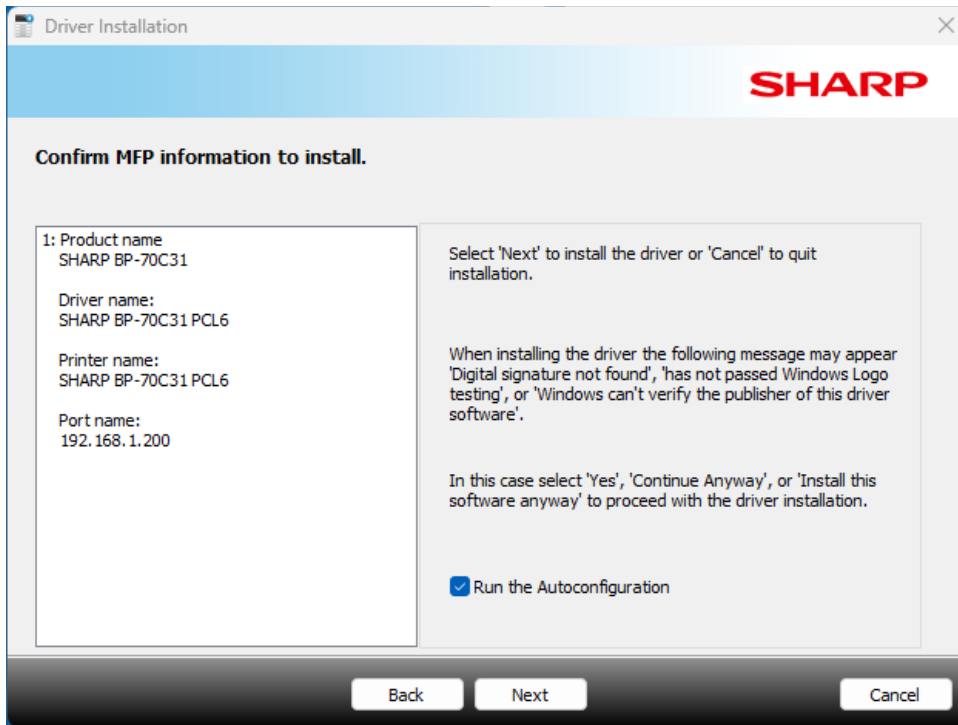

Confirm MFP information to install (make sure that  Run the Autoconfiguration is checked)



Next (driver installs)


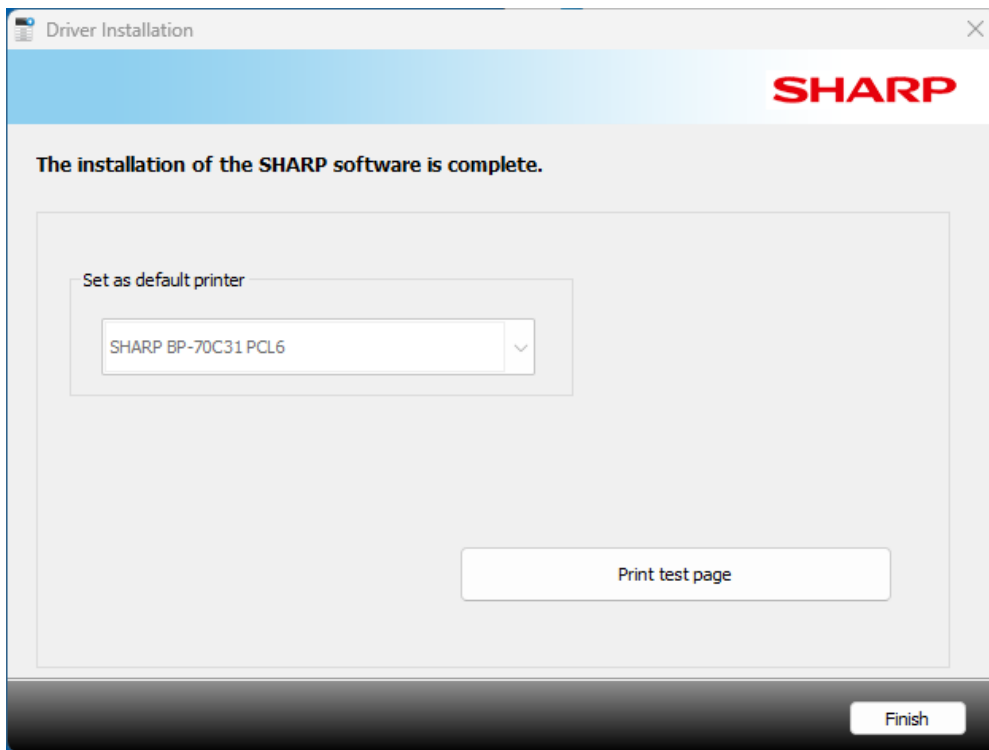


Finish

## Configure the Driver

Control Panel → Devices and Printers → Printers & Scanners → Sharp BP-70C31 PCL6 → Properties

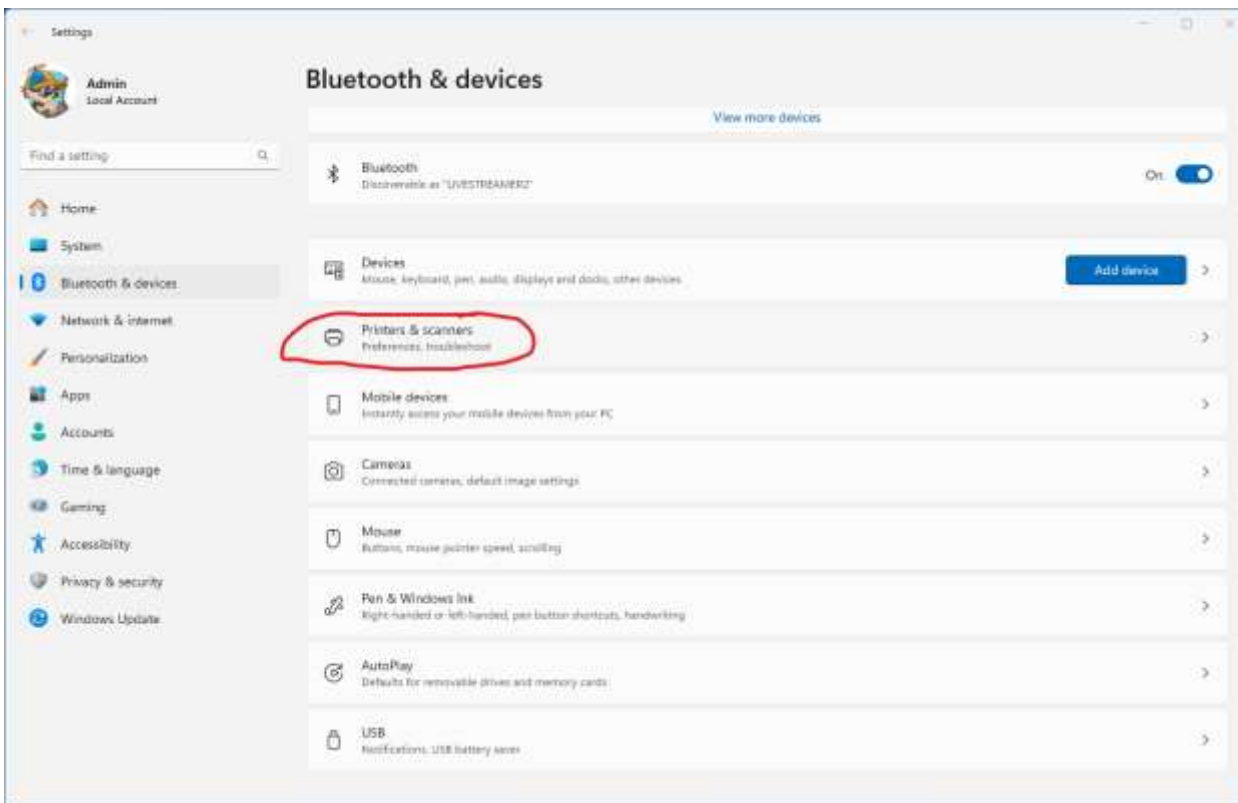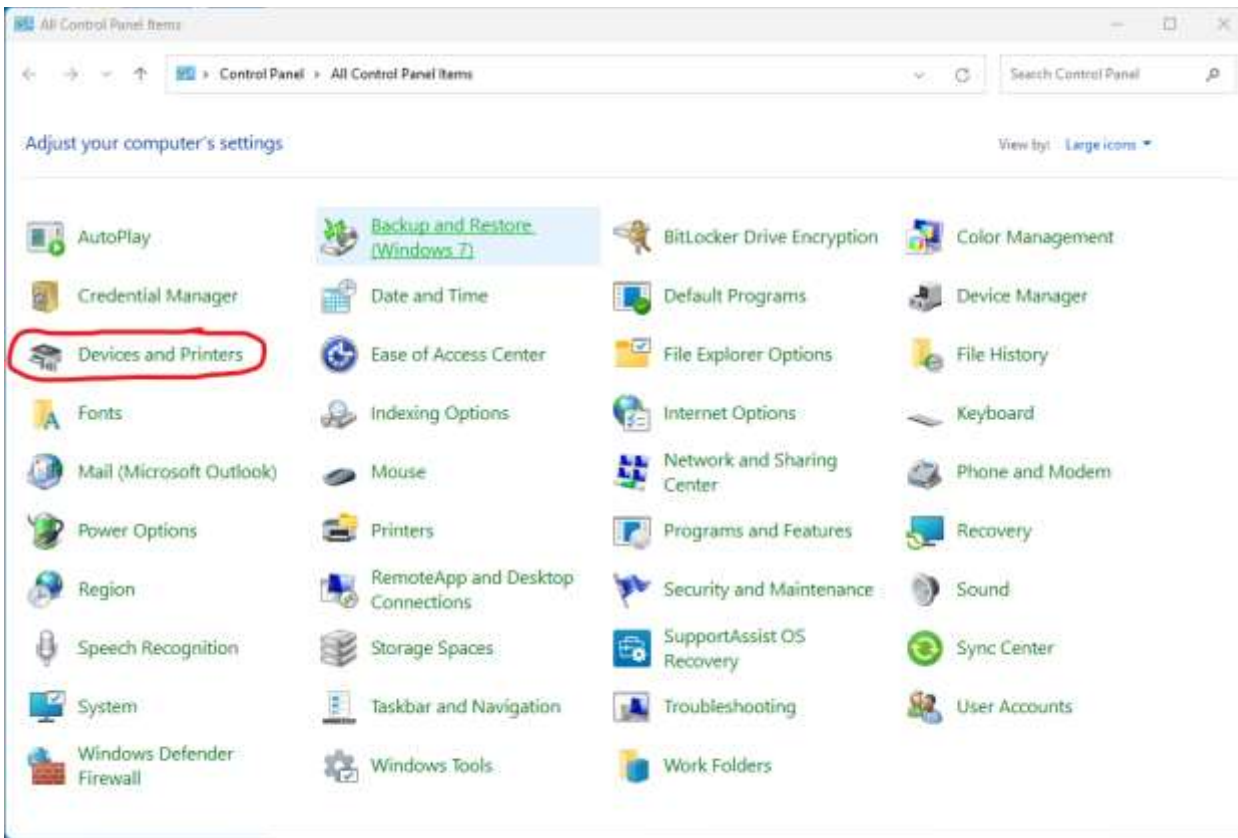

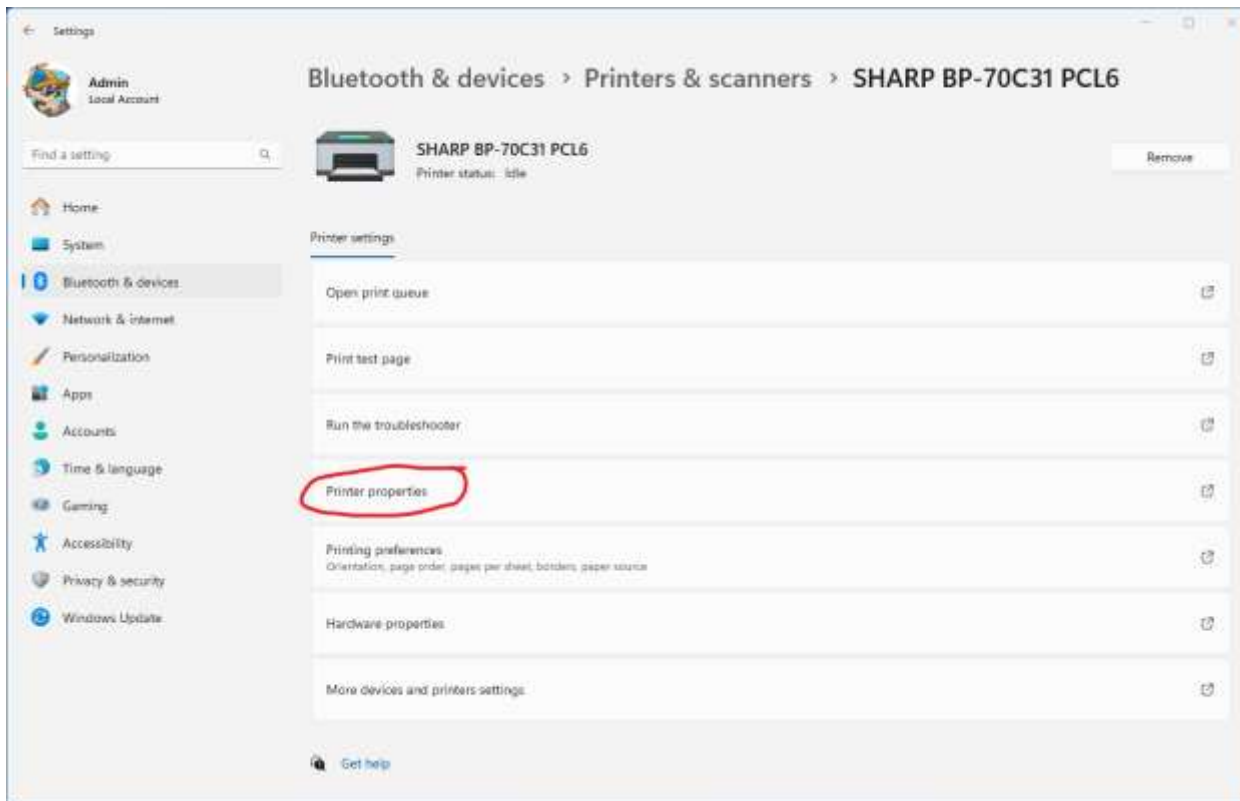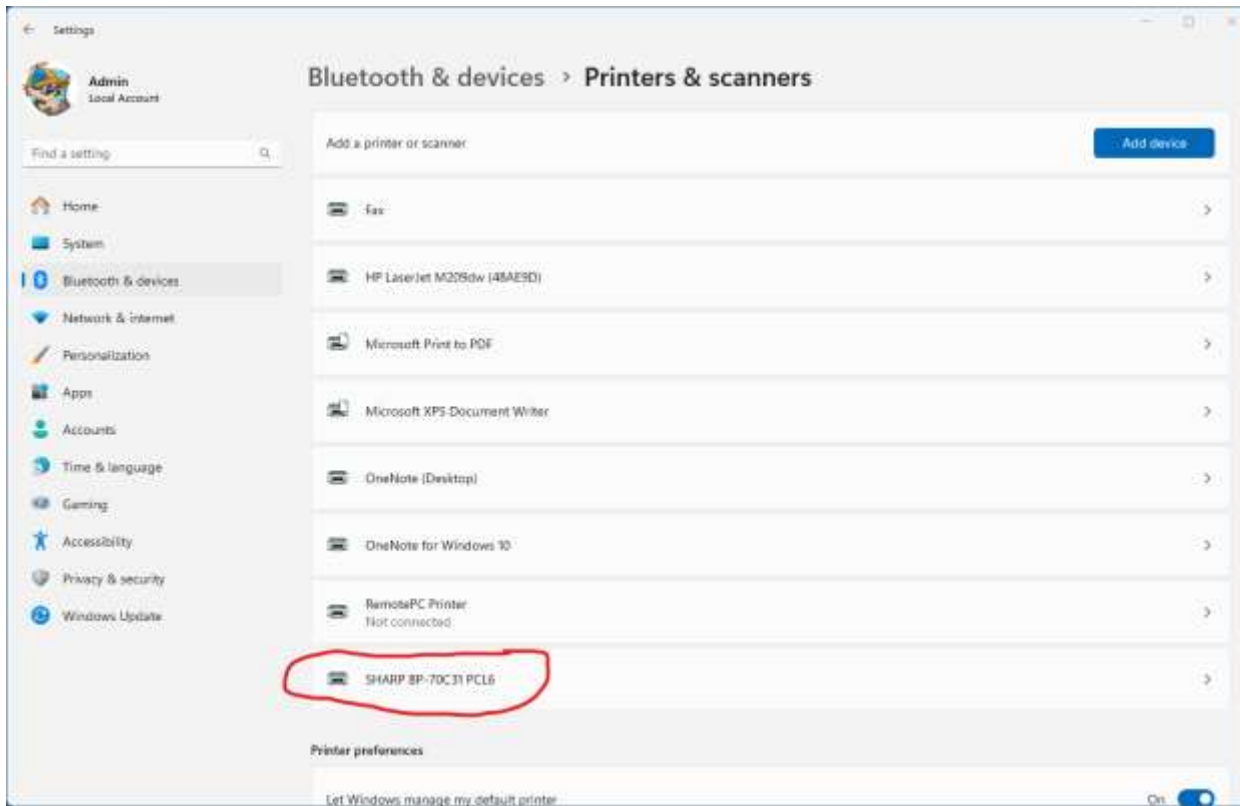


## Security Tab

Print

Manage this printer


Manage documents

Apply

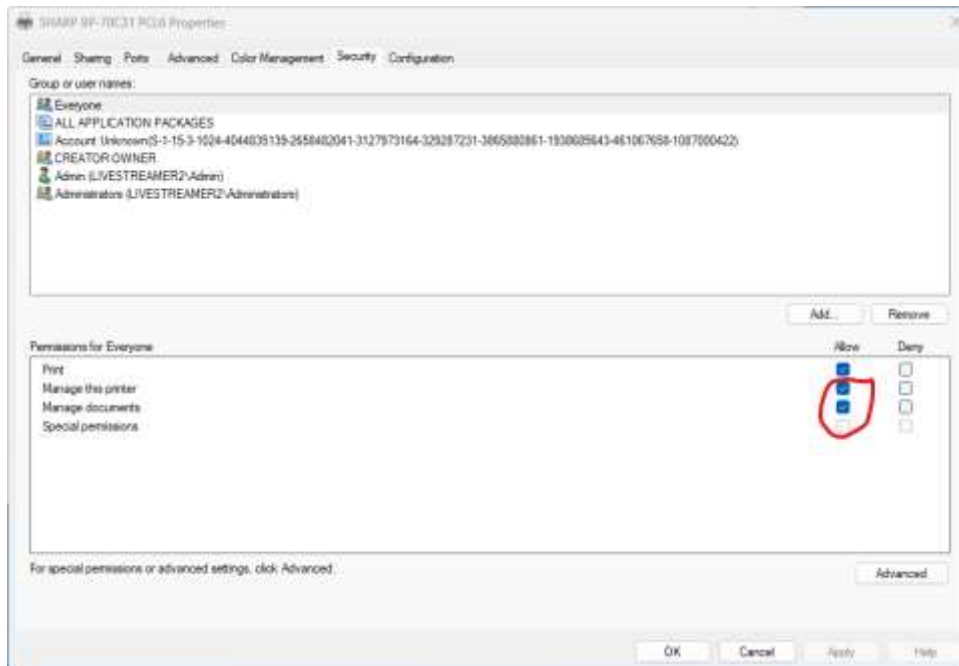


## Advanced Tab

Uncheck  Enable advanced printing features

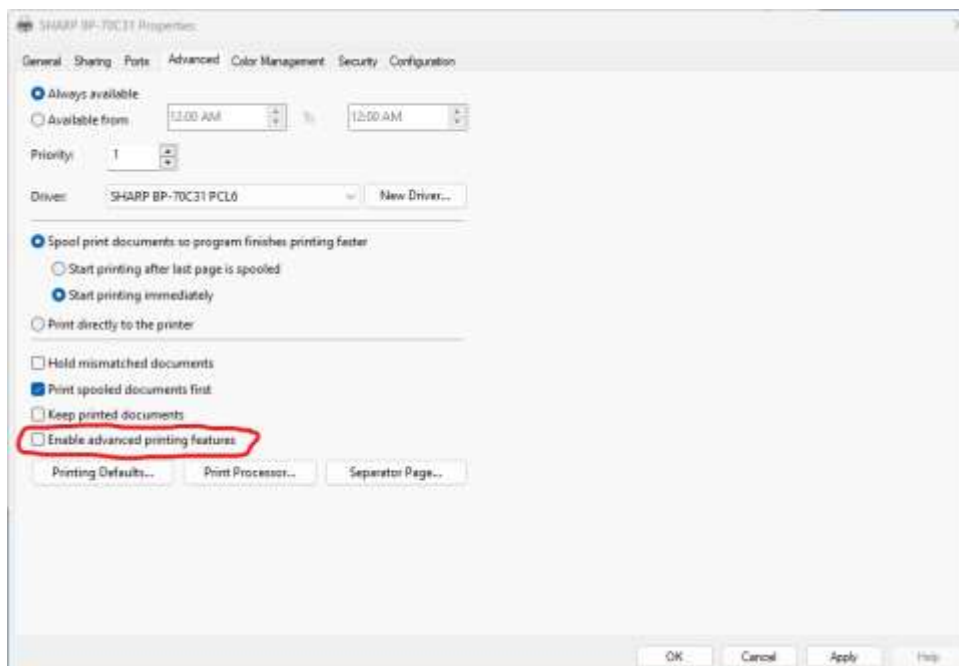


Click on Printing Defaults. . . button

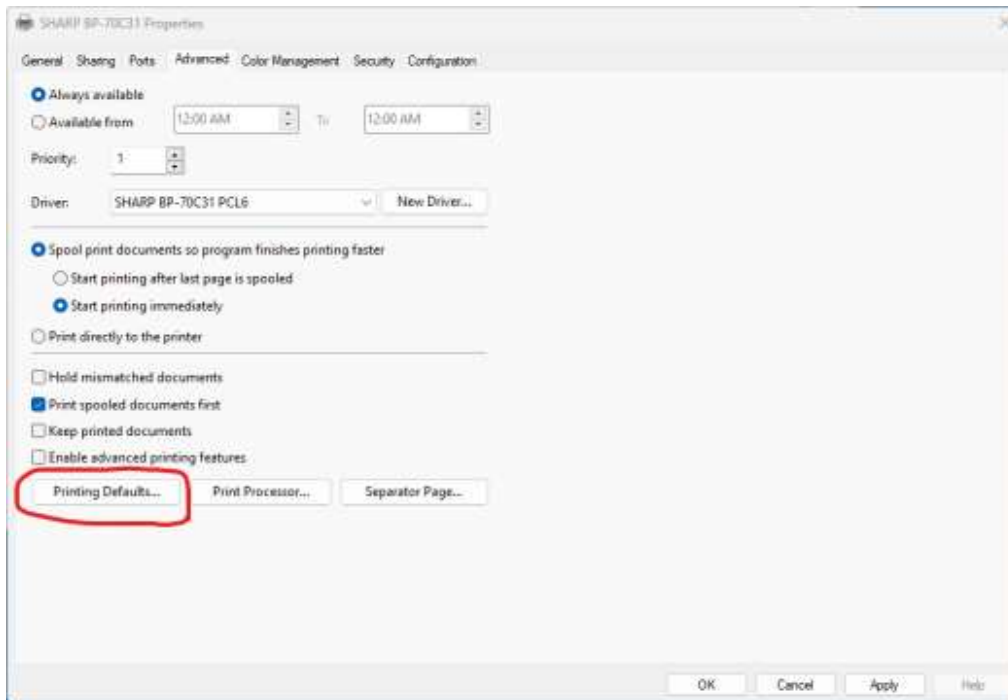


Main Tab

Set 2-Sided Printing to None

Set Color Mode to Black and White

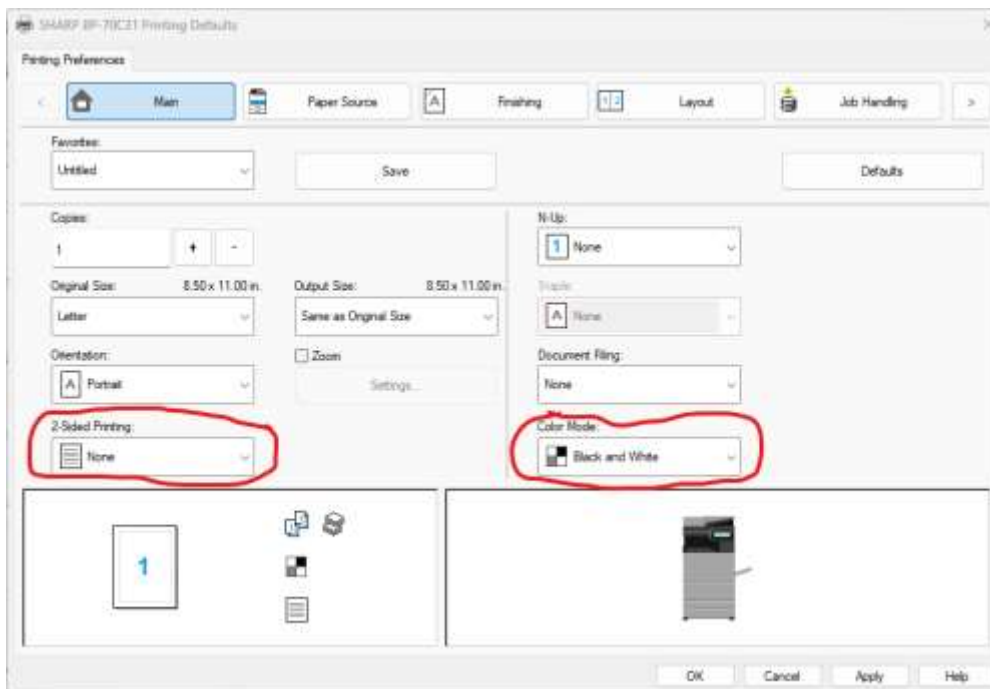

## Job Handling Tab

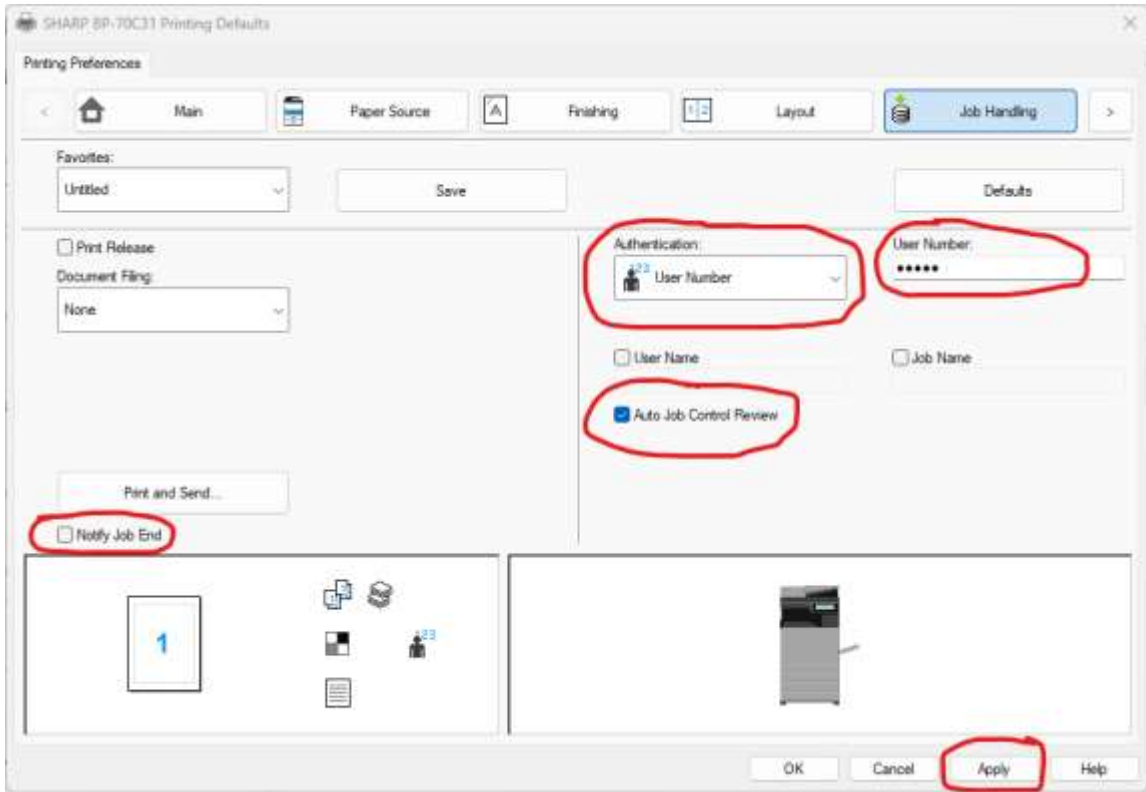

Set Authentication to User Number

Set User Number to 11111


Auto Job Control Review (checked)

Notify Job End (unchecked)


Apply

## General Tab

### Preferences

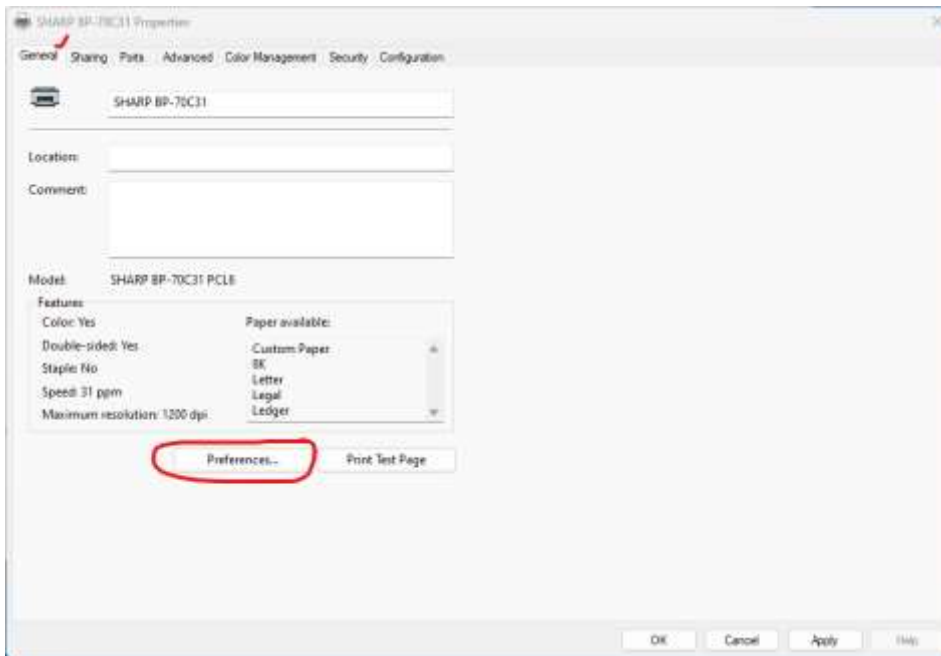

Printing Defaults... button (to check the following settings; they should be mostly there)

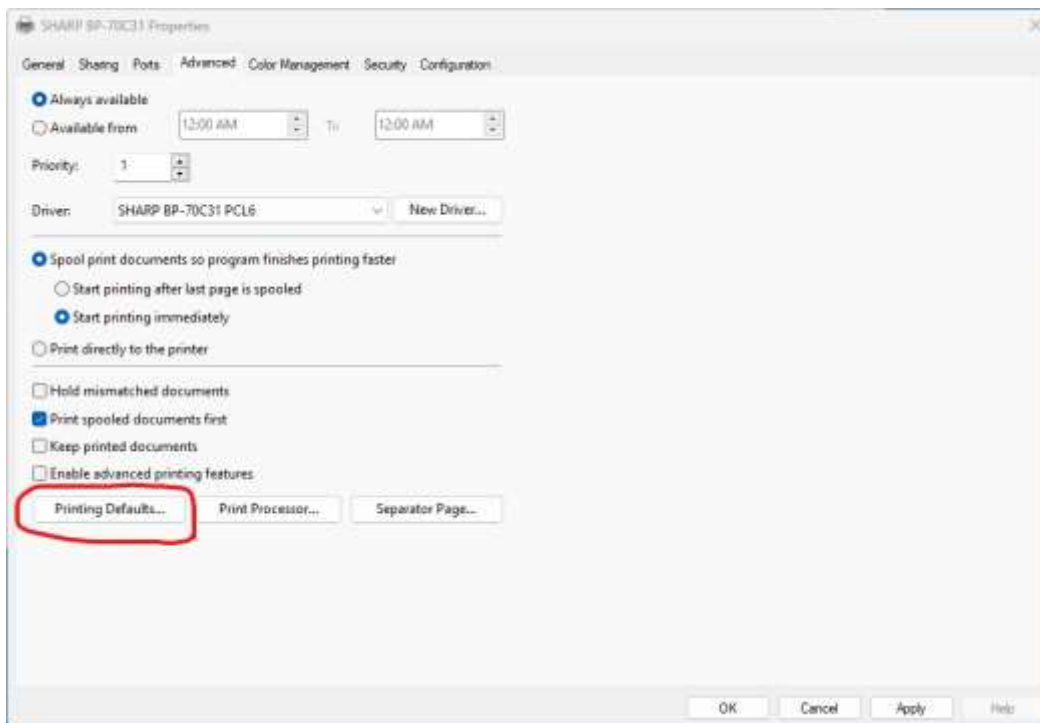




## Main Tab

Set 2-Sided Printing to None

Set Color Mode to Black and White

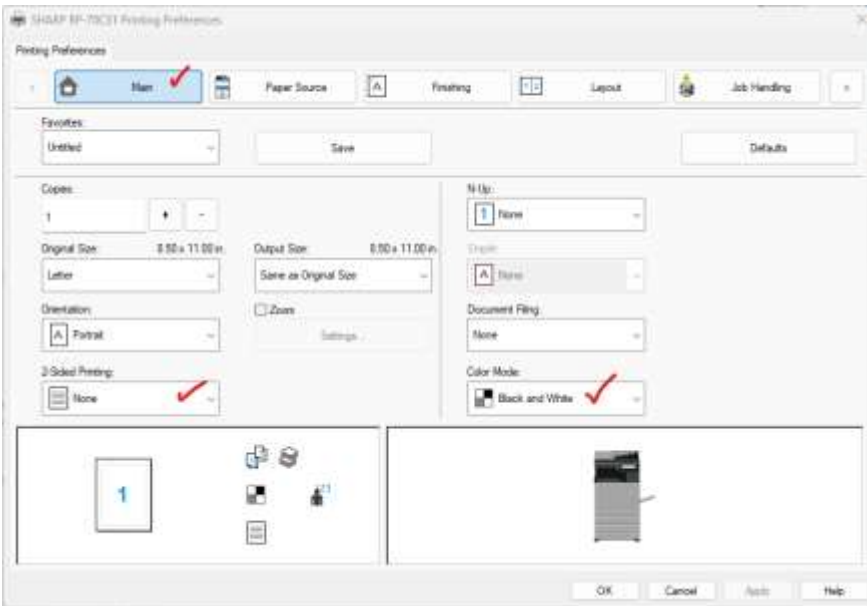


## Job Handling Tab

Set Authentication to User Number


Set User Number to 11111

Auto Job Control Review (checked)

Notify Job End (unchecked)

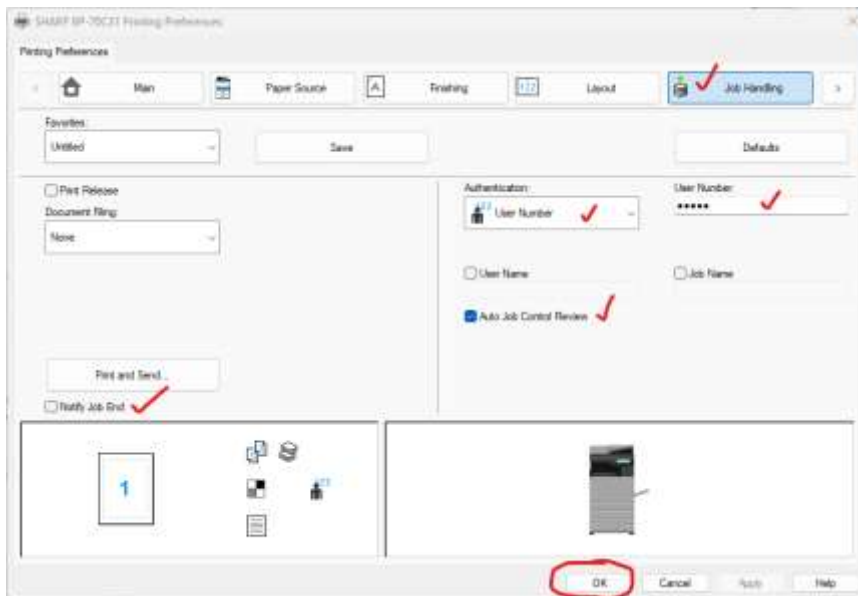

Apply

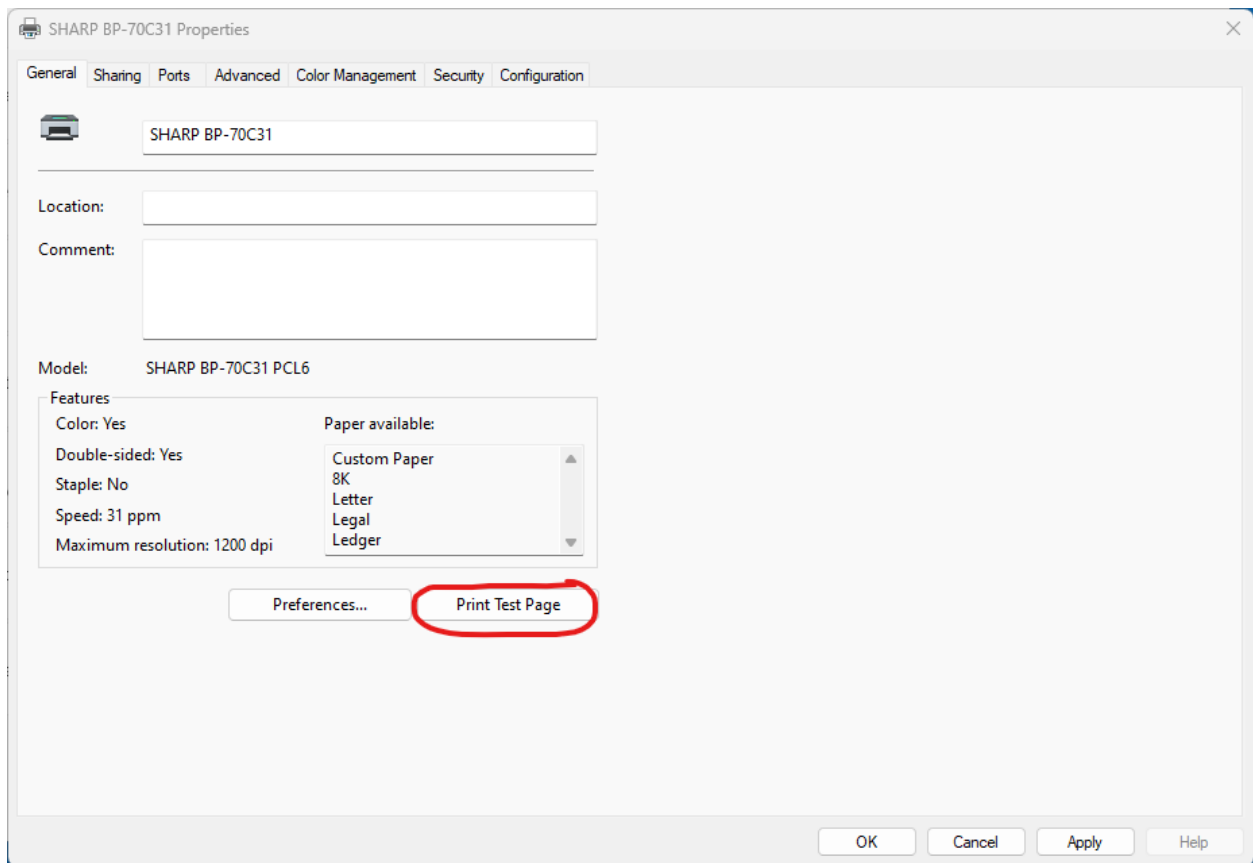

Print Test Page (you should get a printed test page on the Sharp BP-70C31)